
BUILT IN INSTALLTION (Integrated Model)

Step 1. Selecting the best location for the dishwasher
The installation position of dishwasher should be near the existing inlet and drain hoses and power cord.
Illustrations of cabinet dimensions and installation position of the dishwasher.


1. Less than 5 mm between the top of dishwasher and cabinet and the outer door aligned to cabinet.

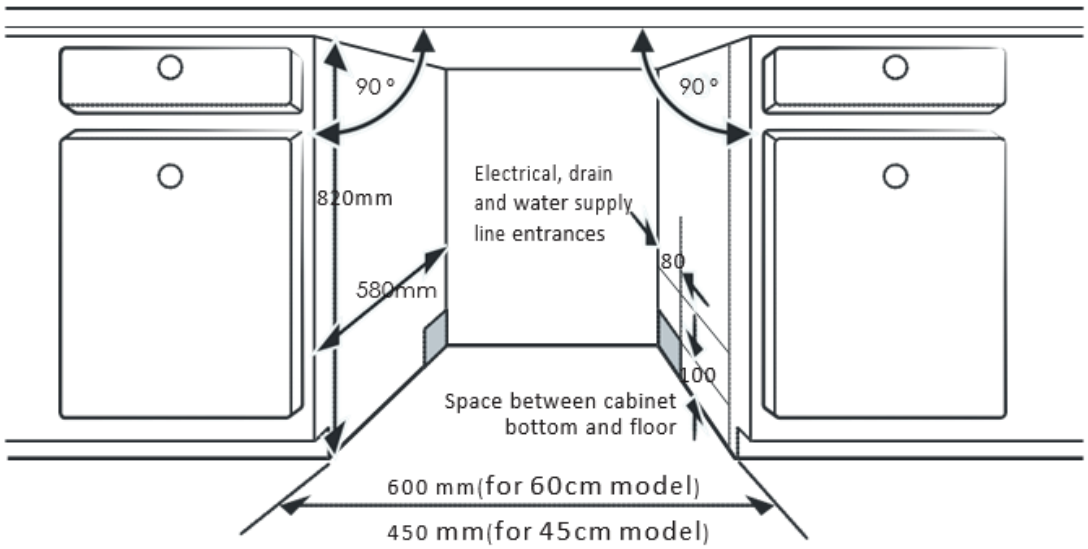


2. If dishwasher is installed at the corner of the cabinet, there should be some space when the door is opened.

NOTE: Depending on where your electrical outlet is, you may need to cut a hole in the opposite cabinet side.

Semi-integrated model
Magical paster A and magical paster B be disjoined on ,magical paster A on the aesthetic wooden panel and felted magical paster B of the outer door of dishwasher (see figure A).
After positioning of the panel , fix the panel onto the outer door by screws and bolts
(See figure B).

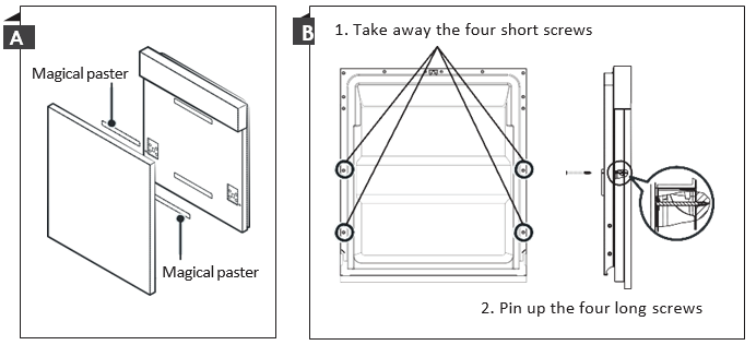

Full-integrated model
Install the hook on the aesthetic wooden panel and put the hook into the slot of the outer door of dishwasher (see figure A).
After positioning of the panel , fix the panel onto the outer door by screws and bolts
(See figure B).

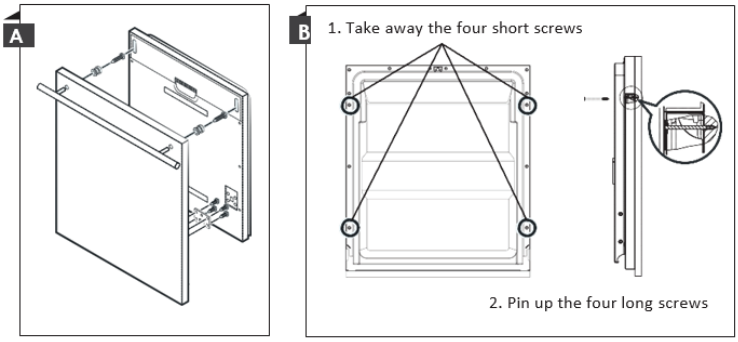

1. The door springs are set at the factory to the proper tension for the outer door. If aesthetic wooden panel are installed, you will have to adjust the door spring tension. Rotate the adjusting screw to drive the adjustor to strain or relax the steel cable.
2. Door spring tension is correct when the door remains horizontal in the fully opened position, yet rises to a close with the slight lift of a finger.

