Test Report issued under the responsibility of:

DEKRA

TEST REPORT

COMMISSION REGULATION (EU) 2019/2019 of 1 October 2019 laying down ecodesign requirements for refrigerating appliances pursuant to Directive 2009/125/EC of the European Parliament and of the Council and repealing Commission Regulation (EC) No 643/2009


COMMISSION DELEGATED REGULATION (EU) 2019/2016 of 11 March 2019 supplementing Regulation (EU) 2017/1369 of the European Parliament and of the Council with regard to energy labelling of refrigerating appliances and repealing Commission Delegated Regulation (EU) No 1060/2010

Report Number..... :	4363935.50
Date of issue ..... :	2020-06-24
Total number of pages	26 Pages
Name of Testing Laboratory Preparing the Report..... :	DEKRA Testing and Certification (Shanghai) Ltd. Guangzhou Branch No.3, Qiyun Road, Huangpu District, Guangzhou, Guangdong, China
Applicant's name..... :	HCK Refrigeration Tech. Co.,Ltd.
Address ..... :	1 Ying An Three Road , Jun'an, Shunde, Foshan, Guangdong, P.R.China
Test specification:	
Standard ..... :	EN 62552-1:2020, EN 62552-2:2020, EN 62552-3:2020, EN 60704-1:2010+A11:2012, EN 60704-2-14:2013+A11:2015+A1:2019
Test procedure..... :	EU 2019/2016, EU 2019/2019
Non-standard test method..... :	N/A
Test Report Form No. ..... :	EN62552-123C
Test Report Form(s) Originator.... :	Dekra Guangzhou
Master TRF ..... :	Dated 2019-12

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing Testing Laboratory.

Test item description..... :	Cellar
Trade Mark..... :	**HCK**
Manufacturer ..... :	Same as applicant
Model/Type reference ..... :	SC-46, SC-46RG
Ratings..... :	220-240 V~, 50 Hz, climate class N

Testing location:	HCK Refrigeration Tech. Co.,Ltd.	
Address.....:	1 Ying An Three Road , Jun'an, Shunde, Foshan, Guangdong, P.R.China	
Tested by (name, function, signature).....:	Elvis Chen	
Approved by (name, function, signature)...:	Jacky Zhang	

Summary of testing:


The tests were performed according to EU 2019/2019, ecodesign requirements for household refrigerating appliances.

Remark:

-	Stage 1	Stage 2
Item	1 March 2021	1 March 2024
	EEI	EEI
dedicated low noise refrigerating appliances with fresh food compartment(s)	375	312
low noise refrigerating appliances with transparent doors	380	300
other low noise refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment	300	250
wine storage appliances with transparent doors	190	172
other wine storage appliances	155	140
all other refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment	125	100


Copy of marking plate:

The artwork below may be only a draft.

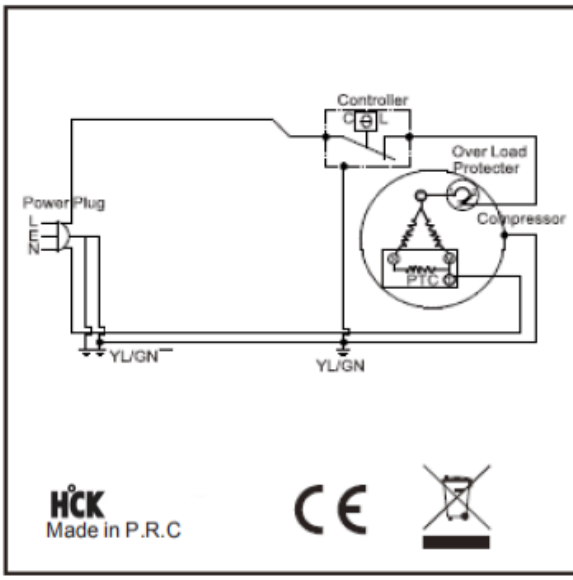

MODEL	SC-46
CLIMATE CLASS	N
STORAGE VOLUME	48 L
PROTECTION CLASS	I
VOLTAGE	220-240V/50Hz
INPUT CURRENT	0.5A
INSULATION BLOWING GAS	Cyclopentane
ENERGY CONSUMPTION	0.269kWh/24h
REFRIGERANT	R600a/17g
SERIAL NO.	

Rating label (draft version only for indicating the related ratings)

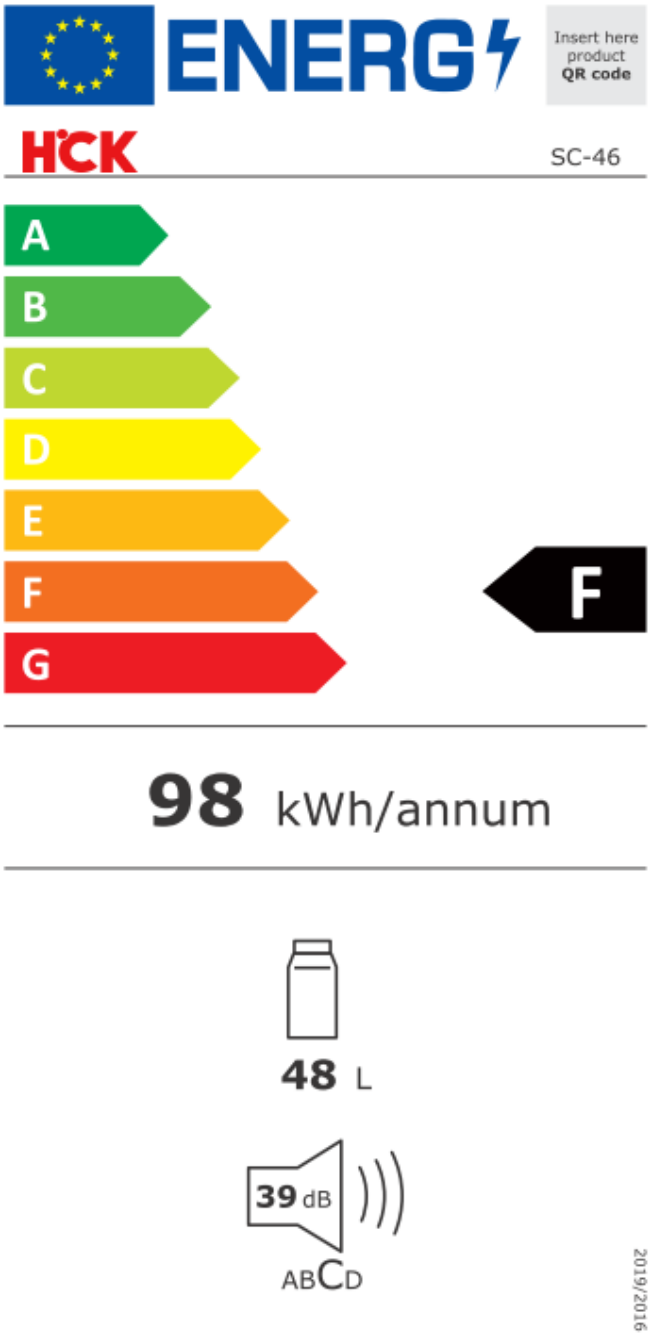

Energy label (draft version only for indicating the related ratings)

Possible test case verdicts:

- test case does not apply to the test object.....: N/A

- test object does meet the requirement.....: P (Pass)

- test object does not meet the requirement.....: F (Fail)

Testing.....:

Date of receipt of test item .....: 2020-04-16

Date (s) of performance of tests .....: 2020-04-16 to 2020-04-28

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.
The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to calculate the uncertainty associated with the measurement result.
The test results presented in this report relate only to the object tested.
The information provided by the customer in this report may affect the validity of the results, the test lab is not responsible for it.
This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

This report is not used for social proof function in China market.

This evaluation is only considered on refrigeration function of the product, for the light source, which shall comply with its own eco-design and energy label regulation.

General product information:

This appliance is a cellar.
Model SC-46 and SC-46RG are identical except model number. After review, model SC-46 was subjected to test.

Model number	Dimensions (Height* Width* Depth)
SC-46	510*430*475
SC-46RG	500*440*475

Product information sheet

Supplier's name or trade mark			HCK		
Supplier's address			1 Ying An Three Road , Jun'an, Shunde, Foshan, Guangdong, P.R.China		
Model identifier			SC-46		
Type of refrigerating appliance			Cellar		
Low-noise appliance:		☐ yes ☒ no	Design type:		☐ built-in ☒ freestanding
Wine storage appliance:		☐ yes ☒ no	Other refrigerating appliance:		☒ yes ☐ no
General product parameters:-					
Parameter		Value	Parameter		Value
Overall dimensions (millimetre)	Height	510 or 500	Total volume (dm^3 or l)		48
	Width	430 or 440			
	Depth	475			
EEI(%)		125	Energy efficiency class		F
Airborne acoustical noise emissions (dB(A) re 1 pW)		39	Airborne acoustical noise emission class		C
Annual energy consumption (kWh/a)		98.19	Climate class:		N
Minimum ambient temperature (°C), for which the refrigerating appliance is suitable		16	Maximum ambient temperature (°C), for which the refrigerating appliance is suitable		32
Winter setting		☐ yes ☒ no			
Compartment Parameters:					
Compartment type		Compartment Volume (dm^3 or l)	Recommended temperature setting for optimised food storage (°C)	Freezing capacity (kg/24 h)	Defrosting type (auto-defrost = A, manual defrost = M)
Pantry	☐ yes ☒ no	—	—	—	—
Wine storage	☐ yes ☒ no	—	—	—	—
Cellar	☒ yes ☐ no	48.0	12	—	M
Fresh food	☐ yes ☒ no	—	—	—	—
Chill	☐ yes ☒ no	—	—	—	—
0-star or ice-making	☐ yes ☒ no	—	—	—	—
1-star	☐ yes ☒ no	—	—	—	—
2-star	☐ yes ☒ no	—	—	—	—
3-star	☐ yes ☒ no	—	—	—	—
4-star	☐ yes ☒ no	—	—	—	—
2-star section	☐ yes ☒ no	—	—	—	—
Variable temperature compartment	compartment types	—	—	—	—
For 4-star compartments					

Fast freeze facility	☐ yes ☒ no
Minimum duration of the guarantee offered by the manufacturer:	
Additional information:	

Additional information to be included in the technical documentation

A general description of the refrigerating model, sufficient for it to be unequivocally and easily identified:-			
Product specifications:-			
General product specifications:-			
Parameter	Value	Parameter	Value
Annual energy consumption (kWh/a)	98	Auxiliary energy (kWh/a)	0
Standard annual energy consumption (kWh/a)	78.46	EEI (%)	125
Temperature rise time (h)	—	Combi parameter(C)	1.00
Door heat loss factor(D)	1.000	Load factor(L)	1.0
Anti-condensation heater type	☐ manual on- off ☐ ambient ☐ other ☒ none		
Additional product specifications for refrigerating appliances, except for low noise refrigerating appliances:-			
Parameter	Value	Parameter	Value
Daily energy consumption at 16 °C (kWh/24h)	0.070	Daily energy consumption at 32 °C (kWh/24h)	0.468
Incremental defrost and recovery energy consumptiona at 16 °C (Wh)	—	incremental defrost and recovery energy consumptiona at 32 °C (Wh)	—
Defrost intervala at 16 °C (h)	—	Defrost interval3 at 32 °C (h)	—
Additional product specifications for low noise refrigerating appliances:			
Parameter	Value	Parameter	Value
Daily energy consumption at 25 °C (kWh/24h)	—	Defrost interval (a) at 25 °C (h)	—
Compartment specifications:-			

Compartment parameters and values						
Compartment type	Target temperature (°C)	Thermodynamic parameter (r c)	*Nc*	*Mc*	Defrost factor *(Ac)*	Built-in factor (Bc)
Pantry	—	—	—	—	—	—
Wine storage	—	—	—	—	—	—
Cellar	+12	0.60	75	0.12	1.00	1.00
Fresh food	—	—	—	—	—	—
Chill	—	—	—	—	—	—
0-star or ice making	—	—	—	—	—	—
1-star	—	—	—	—	—	—
2-star	—	—	—	—	—	—
3-star	—	—	—	—	—	—
4-star	—	—	—	—	—	—
2-star section	—	—	—	—	—	—
Variable temperature compartment	—	—	—	—	—	—

Additional information:

The references of the harmonised standards or other reliable accurate and reproducible methods applied: see page 1


<table>
<tr><th>Clause</th><th>COMMISION REGULATION (EU) 2019/2016</th><th>Result
Remark</th><th>Verdict</th></tr>
<tr><td>1</td><td>Energy efficiency requirements:</td><td></td><td>P</td></tr>
<tr><td></td><td>(a). From 1 March 2021, the energy efficiency index (EEI) of refrigerating appliances shall not be above the values as set out in Table 1.</td><td></td><td>P</td></tr>
<tr><td></td><td>Table 1
Maximum EEI for refrigerating appliances, expressed in % from 01/03/2021 onwards
<table>
<tr><th></th><th>EEI</th></tr>
<tr><td>dedicated low noise refrigerating appliances with fresh food compartment(s)</td><td>375</td></tr>
<tr><td>low noise refrigerating appliances with transparent doors</td><td>380</td></tr>
<tr><td>other low noise refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment</td><td>300</td></tr>
<tr><td>wine storage appliances with transparent doors</td><td>190</td></tr>
<tr><td>other wine storage appliances</td><td>155</td></tr>
<tr><td>all other refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment</td><td>125</td></tr>
</table></td><td></td><td>P</td></tr>
<tr><td></td><td>(b). From 1 March 2024, the EEI of refrigerating appliances shall not be above the values set out in Table 2.</td><td>Not apply until 01/03/2024</td><td>N/A</td></tr>
<tr><td></td><td>Table 2
Maximum EEI for refrigerating appliances, expressed in % from 01/03/2024 onwards
<table>
<tr><th></th><th>EEI</th></tr>
<tr><td>dedicated low noise refrigerating appliances with fresh food compartment(s)</td><td>312</td></tr>
<tr><td>low noise refrigerating appliances with transparent doors</td><td>300</td></tr>
<tr><td>other low noise refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment</td><td>250</td></tr>
<tr><td>wine storage appliances with transparent doors</td><td>172</td></tr>
<tr><td>other wine storage appliances</td><td>140</td></tr>
<tr><td>all other refrigerating appliances, with the exception of low noise combi appliances with a frozen compartment</td><td>100</td></tr>
</table></td><td>Not apply until 01/03/2024</td><td>N/A</td></tr>
<tr><td>2</td><td>Functional requirements:</td><td></td><td>P</td></tr>
<tr><td></td><td>From 1 March 2021, refrigerating appliances shall meet the following requirements:</td><td></td><td>P</td></tr>
<tr><td></td><td>(a) the fast freeze facility, or any similar function achieved through modification of the thermostat settings in freezer compartments, shall, once activated by the end-user according to the manufacturer’s instructions, automatically revert to the previous normal storage temperature conditions after no more than 72 hours;</td><td></td><td>N/A</td></tr>
</table>

Clause	COMMISION REGULATION (EU) 2019/2016	Result Remark	Verdict
	(b) combi appliances which, according to the manufacturer's instructions, can be used in ambient temperatures below + 16 °C and have a winter switch, shall have this winter switch automatically activated or de-activated according to the need to maintain the frozen compartment at the correct temperature;		N/A
	(c) each compartment shall be marked with the appropriate identification symbol. For the frozen compartments this shall be the number of stars of the compartment. For the chill and unfrozen compartments, this shall be an indication, chosen by the manufacturer, of the type of food that should be stored in the compartment;		P
	(d) if the refrigerating appliance contains vacuum insulation panels, the vacuum insulation panels shall be labelled with the letters 'VIP' in a clearly visible and readable way.		N/A
	(e) For 2-star sub-compartments or 2-star sections: — a 2-star sub-compartment or 2-star section is separated from the 3-star or 4-star volume by a partition, container, or similar construction; — the volume of the 2-star sub-compartment or 2-star section does not exceed 20 % of the total volume of the containing compartment.		N/A
	(f) For 4-star compartments, the specific freezing capacity shall be such that the freezing time to bring the temperature of the light load (3,5 kg/100 l) from +25 to - 18 °C at an ambient temperature of 25 °C, is smaller than or equal to 18,5 h.		N/A
	Until 1 March 2024, the requirements laid down in points 2(a) and (b) shall not apply to combi appliances with one electromechanical thermostat and one compressor which are not equipped with an electronic control board.		P
4	Information requirements:		P
	From 1 March 2021, instruction manuals for installers and end-users, and free access website of manufacturers, their authorised representatives and importers shall include the following information:		P
	(a) the combination of drawers, baskets and shelves that result in the most efficient use of energy for the refrigerating appliance;		P
	(b) clear guidance about where and how to store foodstuffs in a refrigerating appliance for best preservation over the longest period, to avoid food waste;		P
	(c) the recommended setting of temperatures in each compartment for optimum food preservation. These settings shall not contradict the storage conditions set out in Annex III, Table 3;		P
	(d) an estimation of the impact of temperature settings on food waste;		P
	(e) a description of the effects of special modes and features, and in particular how temperatures are affected in each compartment and for how long;		P
	(f) for wine storage appliances: 'this appliance is intended to be used exclusively for the storage of wine'. This shall not apply to refrigerating appliances that are not specifically designed for wine storage but may be used for this purpose, or to refrigerating appliances that have a wine storage compartment combined with any other compartment type;		N/A
	(g) instructions for the correct installation and end-user maintenance, including cleaning, of the refrigerating appliance;		P
	(h) for a freestanding appliance: 'this refrigerating appliance is not intended to be used as a built-in appliance';		P
	(i) for appliances without a 4-star compartment: 'this refrigerating appliance is not suitable for freezing foodstuffs';		P
	(j) access to professional repair, such as internet webpages, addresses, contact details;		P
	(k) relevant information for ordering spare parts, directly or through other channels provided by the manufacturer, importer or authorised representative;		P

Clause	COMMISION REGULATION (EU) 2019/2016	Result Remark	Verdict
	(l) the minimum period during which spare parts, necessary for the repair of the appliance, are available;		P
	(m) the minimum duration of the guarantee of the refrigerating appliance offered by the manufacturer, importer or authorised representative;		P
	(n) for refrigerating appliances with climate class: — extended temperate: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 10 °C to 32 °C'; — temperate: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 32 °C'; — subtropical: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 38 °C'; — tropical: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 43 °C';		P
	(o) instruction on how to find the model information in the product database, as define in Regulation (EU) 2019/2016 by means of a weblink that links to the model information as stored in the product database or a link to the product database and information on how to find the model identifier on the product.		P

Annex 1	Location of sensors

A sketch to illustrate the locations of sensors for measuring air temperatures in all compartments (with indication the effective height (*h*) of the compartment (*h*1)

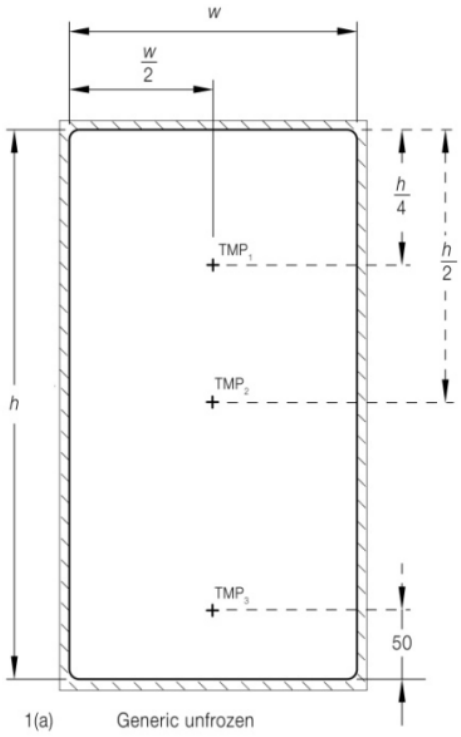

Annex 2	Evaluation of bottle capacity for wine storage compartments

A sketch of the bottle loading plan with the number of standard bottles

N/A

Annex 3	Measurement of storage temperature

A sketch to illustrate compartment loading with M-packages

N//A

Annex 4	Freezing capacity test

A sketch of the storage plan for the refrigerating appliance showing the location of the M-packages and the location of the warmest M-package(s)


N/A

Annex 5	Figure of microphone position

Coordonnées des positions de microphones :
Co-ordinates of microphone positions :

N°	*x*	*y*	*z*
1	2a	0	0,5c
2	a	b	0,5c
3	a	-b	0,5c
4	2a	b	c
5	2a	-b	c
6	a	0	c

Superficie de la surface de mesure:
Measurement surface area :
$S = 2(2ac + 2ab + bc)$

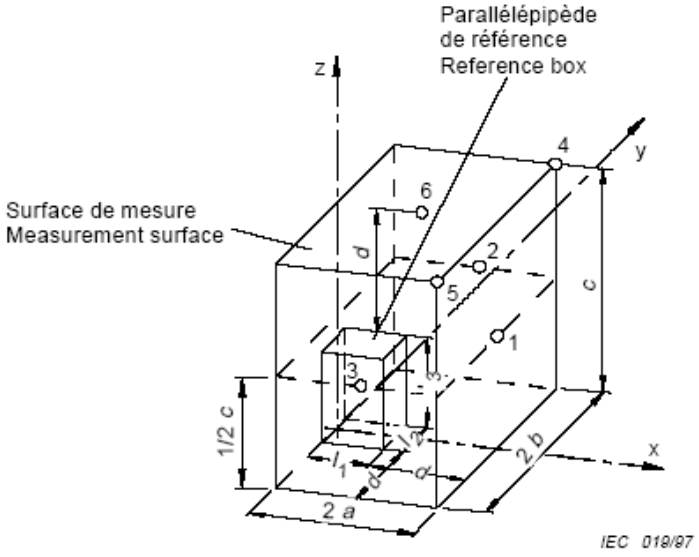

Appendix:

Table for storage temperature					
16°C Storage Temperature Thermostat setting: 1					
Compartment	Cellar compartment		Frozen food storage or food freezer compartment, cabinet or section, as applicable		
Storage temperatures (Periods S)	t_{1m}, t_{2m}, t_{3m} (°C)	t_{ma} (°C)	t* (°C)	t** (°C)	t*** (°C)
	t_{1m} = 12.3 t_{2m} = 11.6 t_{3m} = 11.6	t_{ma} = 11.8	N/A	N/A	M_{max} = N/A
Requirement	2 ≤ t_{1m}, t_{2m}, t_{3m} ≤ +14	≤ +12	≤ –6	≤ –12	≤ –18
Storage temperatures during defrost	N/A	N/A	N/A	N/A	M_{max} = N/A
Requirement for temperature rise	N/A	N/A	N/A	≤ 3K	≤ 3K
Verdict	P	P	N/A	N/A	N/A

Table for storage temperature					
32°C Storage Temperature Thermostat setting: 3					
Compartment	Cellar compartment		Frozen food storage or food freezer compartment, cabinet or section, as applicable		
Storage temperatures (Periods S)	t_{1m}, t_{2m}, t_{3m} (°C)	t_{ma} (°C)	t* (°C)	t** (°C)	t*** (°C)
	t_{1m} = 13.9 t_{2m} = 10.7 t_{3m} = 9.8	t_{ma} =11.5	N/A	N/A	M_{max} = N/A
Requirement	2 ≤ t_{1m}, t_{2m}, t_{3m} ≤ +14	≤ +12	≤ –6	≤ –12	≤ –18
Storage temperatures during defrost	N/A	N/A	N/A	N/A	M_{max} = N/A
Requirement for temperature rise	N/A	N/A	N/A	≤ 3K	≤ 3K
Verdict	P	P	N/A	N/A	N/A

Table for energy consumption				
	32℃		16℃	
	test 1	test 2	test 1	test 2
setting	3	2.5	1	N/A
steady state power -P_{ss}(W)	19.8	18.7	2.7	N/A
steady state temperature-cellar T_{ca}(℃)	11.6	13.0	11.5	N/A
steady state temperature-frozen food T_{fz}(℃)	N/A	N/A	N/A	N/A
Incremental energy -defrost ΔE_{df}(Wh）	N/A	N/A	N/A	N/A
Incremental temperature fresh food -defrost ΔTh_{df}(Kh)	N/A	N/A	N/A	N/A
Incremental temperature frozen food -defrost ΔTh_{df}(Kh)	N/A	N/A	N/A	N/A
defrost interval t_{df}(h)	N/A	N/A	N/A	N/A
Edaily(kWh/day)	0.475	0.449	0.065	N/A
Edaily-Interpolation(kWh/day)	0.468		0.065	
Annual energy consumption （kWh/year）	97.27			
Standard annual energy consumption (kWh/a)	78.46			
Energy Efficiency Index EEI (%)	124.0			
Energy efficiency class	F			

Table for freezing capacity test		
setting	N/A	
Ambient temperature:	25	℃
Light load	N/A	kg
ballast load	N/A	kg
Freezing time of the light load (≤18.5)	N/A	h
the volume of the relevant compartments(L)	N/A	L
the warmest temperature of the M-package of ballast load(≤-15℃)	N/A	℃
the warmest temperature of the M-package of three-star compartment (≤-15℃)	N/A	℃
the warmest temperature of the M-package of two-star compartment (≤-12℃)	N/A	℃
the warmest temperature of the M-package of one compartment (≤-6℃)	N/A	℃
the duration of the temperature deviation above –18 °C and the duration of any defrost control cycle	N/A	h
the duration of the temperature deviation above –12 °C and the duration of any defrost control cycle——two star	N/A	h
average temperature Ta≤7℃	N/A	℃
the highest values of T_1, T_2, T_3(≤10℃)	N/A	℃
the lowest values of T_1, T_2, T_3(≥-1℃)	N/A	℃
the highest and lowest values of T_{c1}, T_{c2}, T_{c3}	N/A	℃
the time which elapsed before it reverted to normal thermostatically controlled operation;	N/A	h
Tested specific freezing capacity	N/A	kg/12 h

Table for temperature rise test		
Ambient temperature: 25 °C		
The maximum temperature of the warmest M-package at the beginning (°C)	The maximum temperature of the warmest M-package at the end(°C)	Test temperature rise time (h)
M_{max}=-18.0	M_{max}=-9.0	N/A

Table for volumes test	
Compartment type	Measured volume (L)
Cellar compartment	48.1
Freezer	N/A
Total	48.1

Table for noise test for SC-46						
Test installation	The sample was installed in accordance with the manufacturer's instruction in the acoustic chamber					
Control setting	3					
Running-in period	Prior to noise measurements, the appliance, equipped as for intended use, had been in operation for the running-in for 24 hrs at an ambient temperature 23 °C ± 3 °C cellar compartment: 12 °C ± 2 K food freezer compartment without separate thermostat: no limitation food freezer compartment with separate thermostat: – 22 °C ± 2 K chill compartment (if applicable): no limitation					
Test compartment temperature	Cellar compartment temperature: 11.3℃ Pre-test food freezer storage compartment temperature:N/A					
Test voltage/frequency:	230 Vac/50 Hz					
Relative humidity	67.5%					
Ambient temperature	22.5 °C					
Background Noise Level [dB]	18.4					
Microphone Position	1 front	2 right	3 left	4 top-right	5 top-left	6 top
L_{pi} [dB]	27.56	26.22	27.69	27.89	25.01	24.79
	27.60	26.12	27.82	27.15	25.00	24.57
	27.60	26.07	27.58	27.81	25.07	24.73
Lpmc/ Averaged Sound Pressure Level [dB (A)]	26.6					
LW/ Sound Power Level [dB(A)]	37.3					
Remark： Measurements were done 3 times and used the averaged value to be the final one						

Table for noise test for SC-46RG						
Test installation	The sample was installed in accordance with the manufacturer's instruction in the acoustic chamber					
Control setting	3					
Running-in period	Prior to noise measurements, the appliance, equipped as for intended use, had been in operation for the running-in for 24 hrs at an ambient temperature 23 °C ± 3 °C cellar compartment: 12 °C ± 2 K food freezer compartment without separate thermostat: no limitation food freezer compartment with separate thermostat: – 22 °C ± 2 K chill compartment (if applicable): no limitation					
Test compartment temperature	Cellar compartment temperature: 11.5℃ Pre-test food freezer storage compartment temperature:N/A					
Test voltage/frequency:	230 Vac/50 Hz					
Relative humidity	67.2%					
Ambient temperature	22.4 °C					
Background Noise Level [dB]	18.9					
Microphone Position	1 front	2 right	3 left	4 top-right	5 top-left	6 top
L_{pi} [dB]	28.56	27.77	27.92	27.53	25.31	25.10
	27.92	26.68	28.12	27.95	25.16	25.12
	27.83	26.71	27.74	27.74	25.52	24.93
Lpmc/ Averaged Sound Pressure Level [dB (A)]	27.0					
LW/ Sound Power Level [dB(A)]	37.7					
Remark： Measurements were done 3 times and used the averaged value to be the final one						

Verdict:				
	Tested value	Rated value	Deviation	Verdict
Storage Volume of cellar Compartment (L)	48.1	48.0	0.2%	P
Storage Volume of Freezer Compartment (L)	N/A	N/A	N/A	N/A
Total volume (L)	48.1	48	0.2%	P
Freezing capacity(kg/12h)	N/A	N/A	N/A	N/A
E_{32}(kWh/day)	0.468	0.468	0%	P
E_{16}(kWh/day)	0.065	0.070	-7.1%	P
Eaux	N/A	N/A	N/A	N/A
Annual energy consumption(kWh/year)	97.27	98	-0.7%	P
Internal humidity of wine storage appliances (%)	N/A	N/A	N/A	N/A
Airborne acoustical noise emissions dB(A)	SC-46: 37.3 SC-46RG: 37.7	39	SC-46: -1.7 dB(A) SC-46RG: -1.3 dB(A)	P
Temperature rise time (h)	N/A	N/A	N/A	N/A

Photos:



Product general –front view (SC-46)



Product general –back view (SC-46)

Photos:



Open door view (SC-46)



Product general –front view (SC-46RG)

Photos:



Product general –back view (SC-46RG)



Open door view (SC-46RG)

Photos:



Compressor view

End of Test Report