Installation Method


There are 2 installation methods. In the standard installation method, the appliance overlaps the work surface. In the flush fit installation, the appliance and work surface are on the same level.

ⓘ For the purpose of installation and use, a minimum of 50 mm space shall be preserved around the hole.

Standard installation method

ⓘ Be sure the thickness of the work surface is at least 30 mm.

◗ Cut out the work surface according to the sizes shown in the drawing.

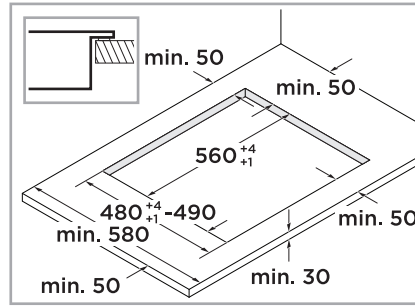

Flush fit installation method

1. Cut out the work surface according to the sizes shown in the drawing.

